




Product highlights

- * Stable performance,6-12-18 zones options
- * 4 LED lights (front and back),LCD display
- * Extremely high sensitivity to find even tiny threats
- * Keyboard and remote control(both)

Dimensional Drawing ▾

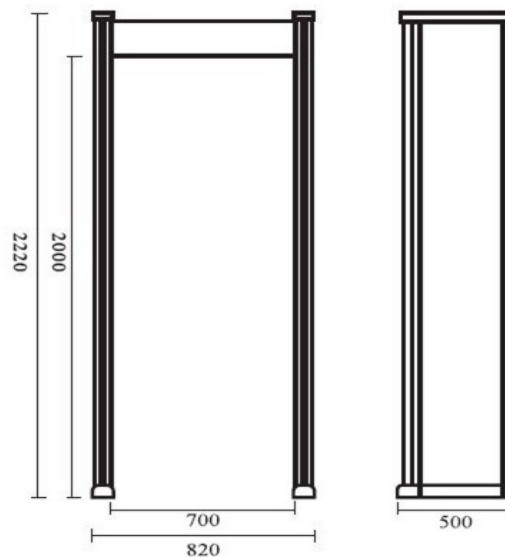

Important Sizes :

Outdoor Size: 2220* 820 * 500mm (H× W × D)

Indoor Size: 2000* 700 *500mm (H× W × D)

Product Details ▾

General Specifications

Outer frame	2220mm(H) x820mm(W)x500mm(D)
Inner frame	2000mm(H)x700mm(W)x500mm(D)
Electrical current	AC100V~240V 50/60Hz
Power	10W
Unit weight	70KG
Signal Frequency	7000-8999Hz(adjustable)
Work environment	-20C to +45C
Sensitivity adjustable	Level 0-299
Alarm	Sound and light
Max distance	0.3m at low sensitivity;0.5m at high sensitivity

Configuration

Lamp panel	B&D door panel board,REVO50
Master control board	Metal-detect-door-mainbd, REV120+remote control receiver
Remote control transmitter	White,
Light bar	Long bar,Metal-detect-door -ledbd,V040
Speaker	Loudspeaker,8Ω 2W,Black,75mmx32mmx27mm

Software

Operation way	Remote control only
Sensibility	<p>With the highest sensibility, it can detect the metal Article as small as the clip.</p> <p>With the range of 0-100, it can be adjusted the Sensibility easily, pre-set the weight, volume, size and location in respect of the metal Articles and eliminate the false alarming for the coin, key, jewelry, leather belt button, etc.</p>
Infrared counting	The intelligent counter can calculate the number of the Passenger flow and the times of alarming.
Alarm settings	eight kind of alarm sound
Detecting areas	Allocation of six mutual over-lapping detecting areas, Simultaneous alarming from multi-areas and accurately ascertaining the location Of the metal articles according to the layout of the metal articles.

Operating Environment

Operation temperature/Humidity	5C-40C / 0%-90%(non-condensing)
Storage temperature/Humidity	-20C-55C / 0%-98%(non-condensing)
Operation Power	220VAC(±10%) 50±3Hz (Optional: 100VAC,110VAC,120VAC,200VAC)